



Weather & UV Resistant
(25 Year outdoor life)





Halogen Free



External mounting system ensures IP level is not compromised



Flame Retardant

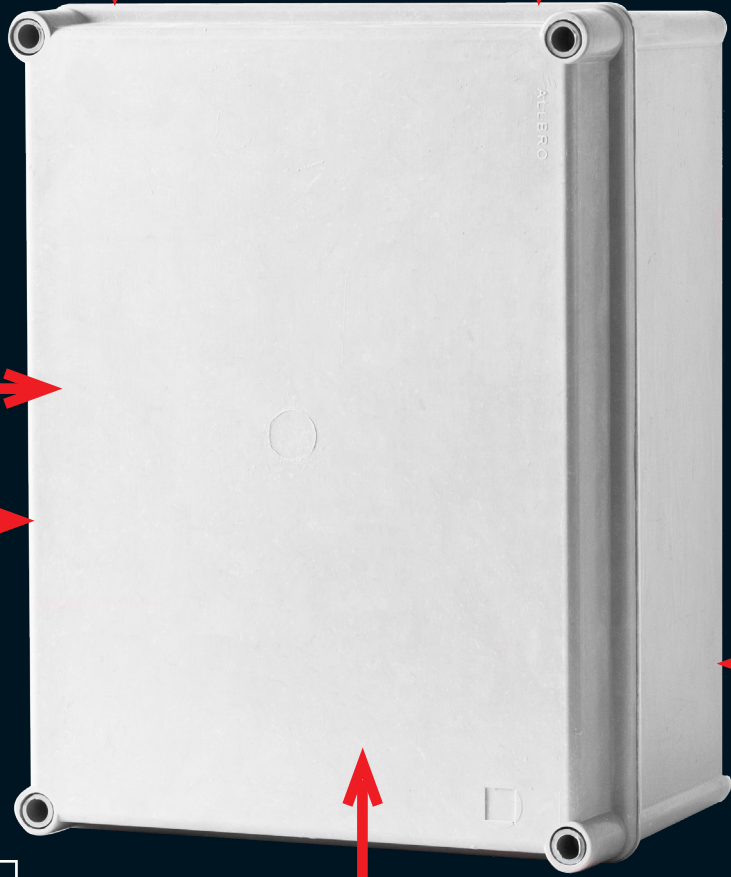

External Hinges can be added



Durable GRP Material



Can be Colour Impregnated

Material	DMC (Dough Moulding Compound)			
Operating Temperature	+200°C on DMC lids and +110°C on Polycarbonate Lids			
Glow Wire Capability / Flammability	960° / UL94 V0			
Expected UV Life (Direct Exposure)	25 years +			
IP Level	IP68			
IK Level	IK9			
Security Level	1	2	3	4

Enclosures

Hinges

Locks

Handles

Accessories

Rotary Operating Handles

Insulators

Transformer Equipment

Index



Dimensions (mm)			Base (mm)	Lid (mm)	7035 RAL Base		Orange Base		Qty per box	Device Plate (Sold Separately)	
H	W	D	D	D	Grey Lid	Clear Lid	Orange Lid	Clear Lid		SMC Version	Powder Coated Mild Steel
					IP 68	IP 68	IP 68	IP 68			
186	151	135	90	45	OK0-G	OK0-GC	OK0-O	OK0-OC	4	OKM-0	OKM-0M
280	185	180	135	45	OK1-G	OK1-GC	OK1-O	OK1-OC	4	OKM-1	OKM-1M
280	280	180	135	45	OK2-G	OK2-GC	OK2-O	OK2-OC	2	OKM-2	OKM-2M
370	280	180	135	45	OK3-G	OK3-GC	OK3-O	OK3-OC	2	OKM-3	OKM-3M
560	370	180	135	45	OK4-G	OK4-GC	OK4-O	OK4-OC	1	OKM-4	OKM-4M



Accessories

Part Number	Description
OKPH-G	DMC Hinge Set -Grey
OKPH-O	DMC Hinge Set -Orange
OKM-MS	Stainless Steel Mounting Brackets
OK-BP	Blind Plug
AE116	Cover Sealing Screws
OKARI-HAND	Handle